



# Light Transmission, Reflection & Absorption

TENARA <sup>®</sup> 4T20HF	Transmission	Reflection	Absorption
Avg. 450-650 nm (visible)	19%	79%	2%
350 nm (UV) (ASTM E903)	<1%	5%	94%

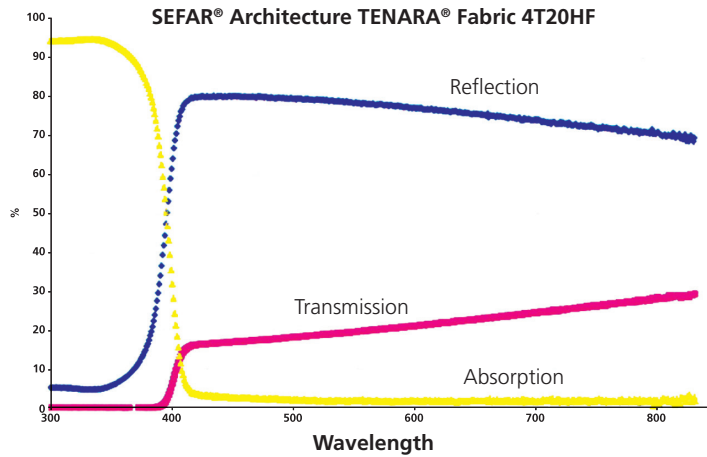

TENARA <sup>®</sup> 4T40HF	Transmission	Reflection	Absorption
Avg. 450-650 nm (visible)	38%	59%	3%
350 nm (UV) (ASTM E903)	13%	8%	79%

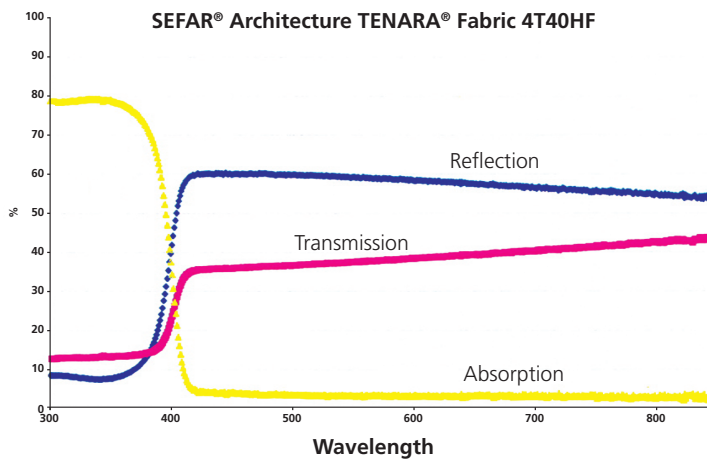

Architecture

